


Stangenscharniere, leicht / Continuous hinges, light



DIN 7956

Hako Norm 11

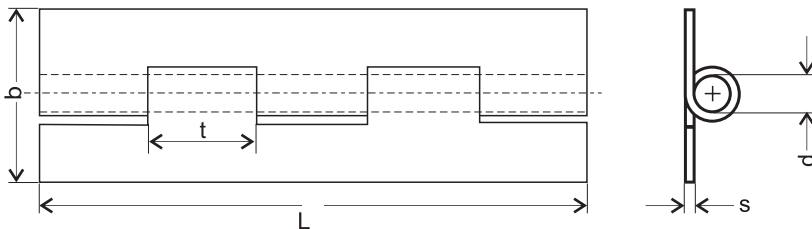

Werkstoff material	Ident-Nr. part-no.	Bezeichnung identification	Breite offen width open	Stärke thickness	Stift pin	Teilung gauge	Länge length	Gewicht kg / St. weight kg / pc.	Lochung holes
			mm b	mm s	d	t			
Alu alu	11012000	1101 C	32	0,80	1,75	30	3500	0,35	
	11019000		32	1,00	1,75	15	3500	0,44	
Stahl blank bright steel	11050100	1105 C	20	0,70	1,75	30	3500	0,54	
	11051100		25	0,70	1,75	15	3500	0,65	
	11051000		25	0,80	1,75	30	3500	0,74	
	11059000		25	1,00	1,75	15	3500	0,90	
	11052100		32	0,70	1,75	15	3500	0,74	
	11052000		32	0,80	1,75	30	3500	0,88	
	11058000		32	1,00	1,75	15	3500	1,08	
11053000	40	0,80	1,75	30	3500	1,08			
Niro stainless steel	11072000	1106 C	20	0,70	1,75	15	3500	0,54	
	11060000		25	0,70	1,75	30	3500	0,65	
	11069000		25	1,00	1,75	15	3500	0,90	
	11070000		32	0,70	1,75	15	3500	0,74	
	11062000		32	0,70	1,75	30	3500	0,74	
	11066000		32	1,00	1,75	15	3500	1,03	
	11063000		40	0,80	1,75	15	3500	1,05	
	11071000		40	1,00	1,75	15	3500	1,31	
	11067000	1106 SL	32	0,70	1,75	30	3500	0,73	x
11068000	40	0,80	1,75	15	3500	1,05	x		
Alu alu	13010000	1301 C	32	1,25	2,50	30	3500	0,63	
	13011000		40	1,25	2,50	30	3500	0,74	
	13012000		45	1,25	2,50	30	3500	0,79	
Stahl blank bright steel	13050000	1305 C	32	1,25	2,50	30	3500	1,52	
	13051000		40	1,25	2,50	30	3500	1,80	
	13052000		45	1,25	2,50	30	3500	1,98	
	13053000		50	1,25	2,50	30	3500	2,15	
	13054000		60	1,25	2,50	30	3500	2,33	




Fertigungslänge / standard length: 3500 mm / 2000 mm • Fixlängen auf Anfrage / fixed length on enquiry
 Lochung: Senklöcher / holes: countersunk holes • Lochabstand / hole-distance: ca. 60 mm

Stangenscharniere, leicht / Continuous hinges, light



DIN 7956

Hako Norm 13-15

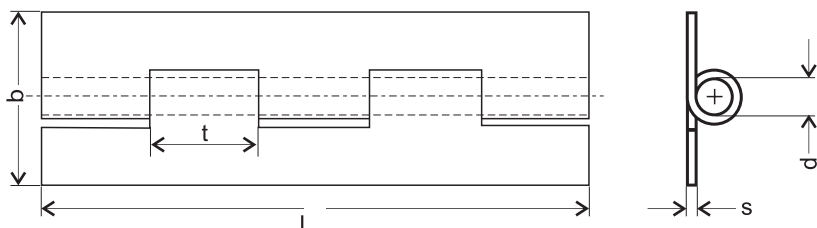

Werkstoff material	Ident-Nr. part-no.	Bezeichnung identification	Breite offen width open	Stärke thickness	Stift pin	Teilung gauge	Länge length	Gewicht kg / St. weight kg / pc.	Lochung holes
			mm b	mm s	d	t			
Niro stainless steel	13060000	1306 C	32	1,25	2,50	30	3500	1,52	
	13061000		40	1,25	2,50	30	3500	1,80	
	58635000		50	1,25	2,50	15	3500	2,15	
	13064000		60	1,25	2,50	30	3500	2,33	
Alu alu	15010000		32	1,50	3,00	30	3500	0,63	
	15011000		40	1,50	3,00	30	3500	0,77	
	15013000		50	1,50	3,00	30	3500	1,07	
	15014000		60	1,50	3,00	30	3500	1,23	
Stahl blank bright steel	15050000	1505 C	32	1,50	3,00	30	3500	1,88	
	15051000		40	1,50	3,00	30	3500	2,26	
	15052000		45	1,50	3,00	30	3500	2,58	
	15053000		50	1,50	3,00	30	3500	2,68	
	15054000	60	1,50	3,00	30	3500	3,08		
	15055000	1505 SL	32	1,50	3,00	30	3500	1,86	x
15057000	40		1,50	3,00	30	3500	2,26	x	
Niro stainless steel	15060000	1506 C	32	1,50	3,00	30	3500	1,88	
	15061000		40	1,50	3,00	30	3500	2,26	
	15062000		45	1,50	3,00	30	3500	2,34	
	15063000		50	1,50	3,00	30	3500	2,68	
	15064000		60	1,50	3,00	30	3500	3,08	
	15065000		1506 SL	32	1,50	3,00	30	3500	1,86
	15066000	40		1,50	3,00	30	3500	2,26	x



Fertigungslänge / standard length: 3500 mm / 2000 mm • Fixlängen auf Anfrage / fixed length on enquiry
 Lochung: Senklöcher / holes: countersunk holes • Lochabstand / hole-distance: ca. 60 mm