


Stangenscharniere, mittelschwer / Continuous hinges, medium



DIN 7956

Hako Norm 21-31

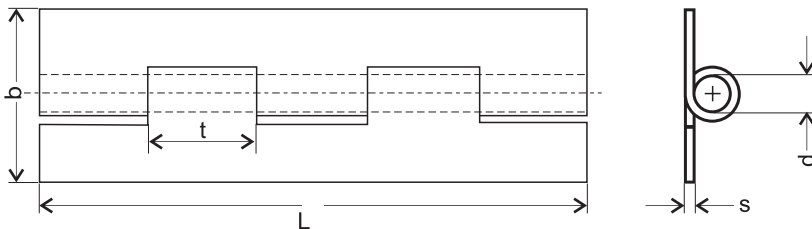

Werkstoff material	Ident-Nr. part-no.	Bezeichnung identification	Breite offen width open	Stärke thickness	Stift pin	Teilung gauge	Länge length	Gewicht kg / St. weight kg / pc.	Lochung holes
			mm b	mm s	d	t			
Niro stainless steel	58453000	K2106 C	50	1,25	6,00	30	2000	1,72	
Stahl blank bright steel	23052000	2305 C	45	1,50	6,00	60	3500	3,31	
	23053000		50	1,50	6,00	60	3500	3,48	
	23054000		60	1,50	6,00	60	3500	4,15	
Niro stainless steel	23063000	2306 C	50	1,50	6,00	60	2000	2,01	
	23069000		50	1,50	6,00	60	3500	3,45	
	23064000		60	1,50	6,00	60	2000	2,37	
Stahl blank bright steel	27052000	2705 C	45	1,50	8,00	60	3500	3,94	
	27053000		50	1,50	8,00	60	3500	4,15	
	27054000		60	1,50	8,00	60	3500	4,78	
Niro stainless steel	27063000	2706 C	50	1,50	8,00	60	2000	2,37	
	27064000		60	1,50	8,00	60	2000	2,73	
Alu alu	31011000	3101 C	50	2,00	4,00	30	2000	0,71	
	31012000		60	2,00	4,00	30	2000	0,85	
Stahl blank bright steel	31050000	3105 C	40	2,00	4,00	30	3500	3,24	
	31051000		50	2,00	4,00	30	3500	3,85	
	31052000		60	2,00	4,00	30	3500	4,38	
Niro stainless steel	31060000	3106 C	40	2,00	4,00	30	2000	1,85	
	31061000		50	2,00	4,00	30	2000	2,20	
	31062000		60	2,00	4,00	30	2000	2,50	



Fertigungslänge / standard length: 3500 mm / 2000 mm • Fixlängen auf Anfrage / fixed length on enquiry
 Lochung: Senklöcher / holes: countersunk holes • Lochabstand / hole-distance: ca. 60 mm